



## Multi-purpose homogeneous vinyl floorings with excellent value for money, for education, retail and commercial sectors

### SENSORIAL BENEFITS

- Directional pattern
- Classical designs

### FUNCTIONAL BENEFITS

- Wear group P\*
- Practical patterns
- Weldable formulation
- PUR surface treatment for easier initial maintenance\*\*

### ENVIRONMENTAL BENEFITS

- Recyclable
- Low VOC emissions



\*Except Vylon Plus: Group M

\*\*Except Vylon Plus: factory pre-treated



**Homogeneous vinyl flooring:**  
requires only dry buffing to regenerate  
its original appearance throughout  
lifetime

**CONTRACT PLUS  
STANDARD PLUS  
VYLON PLUS**

TECHNICAL DATA	STANDARDS	Contract Plus	Standard Plus 2.0mm	Standard Plus 1.5mm	Vylon Plus
<b>Classification</b>					
<b>Classification</b>	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 34 43	Classes: 32 41	Classes: 34 43
<b>Characteristics</b>					
<b>Total thickness</b>	ISO 24346 (EN 428)	2.00mm	2.00mm	1.5mm	2.00mm
<b>Wear layer thickness</b>	ISO 24340 (EN 429)	2.00mm	2.00mm	1.5mm	2.00mm
<b>Total weight</b>	ISO 23997 (EN 430)	3 150g/m <sup>2</sup>	3 300g/m <sup>2</sup>	2 475g/m <sup>2</sup>	3 700g/m <sup>2</sup>
<b>Surface treatment</b>	-	PUR			Factory pre-treated
<b>Abrasion group</b>	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>			Group M: ≤ 7.50mm <sup>3</sup>
<b>Technical performances</b>					
<b>Residual indentation</b>	Average measured value	0.04mm			
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm			
<b>Reaction to fire</b>	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>s1</sub> s1 ≥ 8 kW/m <sup>2</sup> Pass			
<b>Dimensional stability</b>	ISO 23999 (EN 434)	Rolls: ≤ 0.40%	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
<b>Castor wheel test</b>	ISO 4918 (EN 425)	Suitable			
<b>Marine equipment</b>	IMO FTPC Part 5 and 2 IMO Res. A653	 0575	-	 0575	
<b>Static electrical charge</b>	EN 1815	< 2kV			
<b>Light fastness</b>	EN ISO 105-B02	≥ 6			
<b>Chemical resistance</b>	ISO 26987 (EN 423)	Good resistance			
<b>Fungi and bacteria resistance</b>	ISO 846: Part C	Does not favour growth			
<b>Clean room test</b>	ASTM F51/00	Class A			
<b>Slip resistance</b>	DIN 51130 EN 13893	R9 ≥ 0.3			
<b>Thermal resistance Underfloor heating</b>	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C		Suitable - max. 27°C	0.01m <sup>2</sup> K/W Suitable - max. 27°C
<b>Form of delivery</b>	ISO 24341 (EN 426) ISO 24342 (EN 427)	Rolls: 23lm x 2m	Rolls: 23lm x 2m Tiles: 50 x 50cm	Rolls: 25lm x 2m	Rolls: 20lm x 2m Tiles: 61 x 61cm 30 x 30cm
<b>Colours</b>	EN 12667 / DIN 52612	24	30 (rolls) 10 (tiles)	12	18

The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.




Download the product offer

# CONTRACT PLUS




Contract Plus - 3132 469



3132 468



3132 467




3132 466




3132 755




3132 757




3132 469



3132 758



3132 473




3132 470



3132 761




3132 763

TECHNICAL DATA	STANDARDS	Contract Plus
<b>Classification</b>		
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 150g/m <sup>2</sup>
Surface treatment	-	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>		
Residual indentation	Average measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>f1</sub> ≤ 1 ≥ 8 kW/m <sup>2</sup> Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.



 3132 756

## CONTRACT PLUS

### Main Product Features

- Non-linear pattern
- Wide and coordinated colour range
- Durable - Wear group P
- PUR surface treatment  
(no initial surface treatment needed)
- Good chemical resistance

### Surface Treatment



### Sustainability Tag



### Logistics Information



Available in rolls  
Rolls length: 23lm

Laying direction:



### General Information




Play with the Room Designer

# CONTRACT PLUS




Contract Plus - 3132 471



 3132 759



 3132 474




 3132 472




 3132 471



 3132 753





 3132 764



 3132 475





 3132 760





 3132 762



 3132 754



 3132 476

TECHNICAL DATA	STANDARDS	Contract Plus
<b>Classification</b>		
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43
<b>Characteristics</b>		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 150g/m <sup>2</sup>
Surface treatment	-	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>		
Residual indentation	Average measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>fl</sub> ≤ 1 ≥ 8 kW/m <sup>2</sup> Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	 0575
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Clean room test	ASTM F51/00	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.



 3132 477

## CONTRACT PLUS

### Main Product Features

- Non-linear pattern
- Wide and coordinated colour range
- Durable - Wear group P
- PUR surface treatment  
(no initial surface treatment needed)
- Good chemical resistance

### Surface Treatment



### Sustainability Tag



### Logistics Information



Available in rolls  
Rolls length: 23lm

Laying direction:




### General Information






Play with the Room Designer

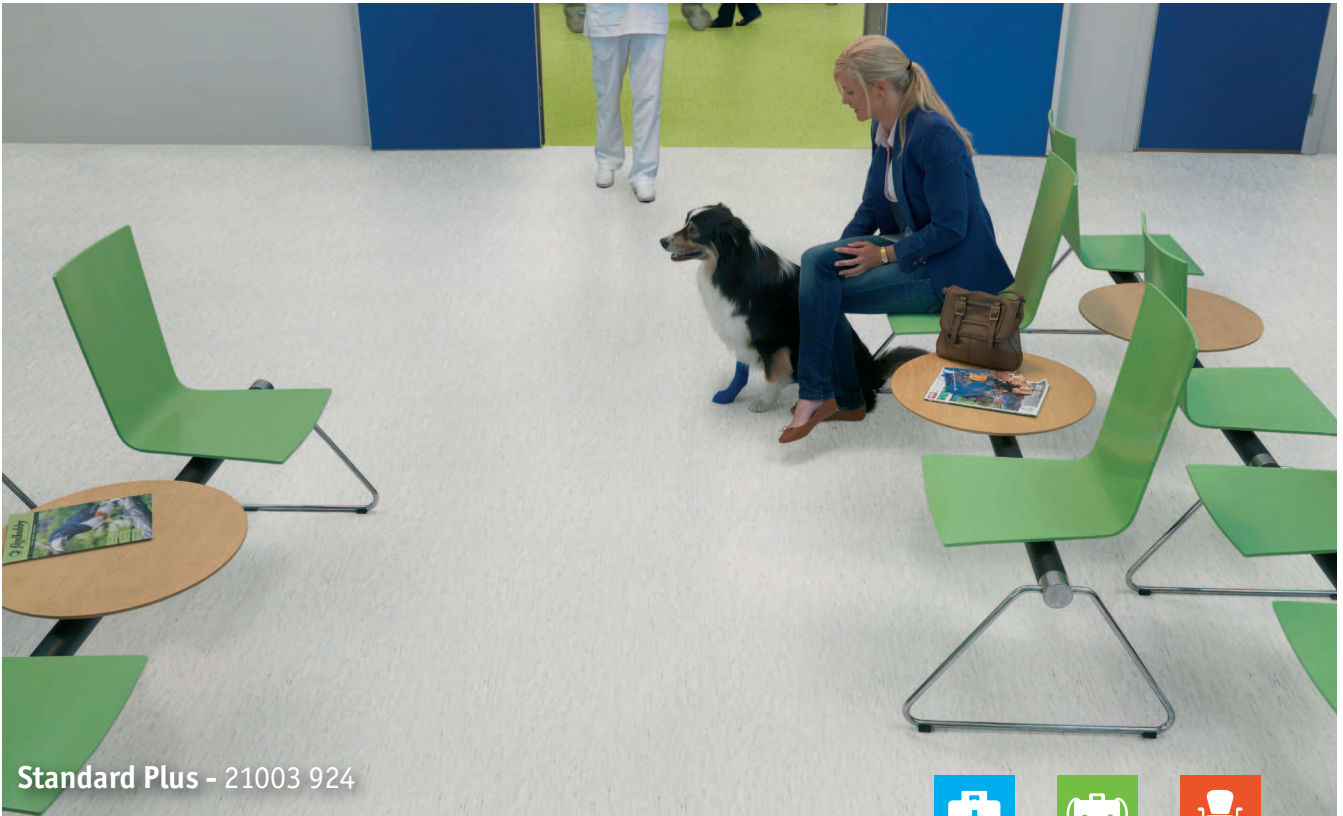
# STANDARD PLUS







 21 003 497  
 21 004 497




 21 003 924  
 21 005 924  
 21 006 924





 21 003 498  
 21 004 498  
 21 005 498  
 21 006 498







 21 003 499



 21 003 910




 21 003 911  
 21 004 911  
 21 005 911  
 21 006 911





 21 003 482  
 21 004 482





 21 003 912  
 21 004 912





 21 003 913  
 21 005 913  
 21 006 913



 21 003 914




 21 003 915

TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
<b>Classification</b>			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
<b>Characteristics</b>			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m <sup>2</sup>	2 475g/m <sup>2</sup>
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>f1</sub> ≤ 1 ≥ 8 kW/m <sup>2</sup> Pass	B <sub>f1</sub> ≤ 1 ≥ 8 kW/m <sup>2</sup> Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653		-
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C	Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.



 21 003 496

## STANDARD PLUS

### Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

### Surface Treatment




### Sustainability Tag



### Logistics Information

 Available in rolls  
Rolls length: 23lm (2.0mm)



 Rolls length: 25lm (1.5mm)

Laying direction: 

 Available in tiles

Laying direction: 

### General Information

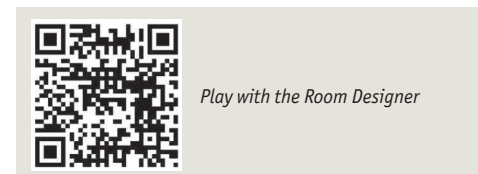




# STANDARD PLUS




Standard Plus - 21003 483




 21 003 921  
 21 005 921  
 21 006 921







 21 003 922  
 21 004 922



 21 003 923








 21 003 494  
 21 004 494  
 21 005 494  
 21 006 494




 21 003 919  
 21 004 919





 21 003 492  
 21 004 492  
 21 005 492  
 21 006 492






 21 003 920




 21 003 479  
 21 004 479  
 21 005 479  
 21 006 479




 21 003 483  
 21 005 483  
 21 006 483



 21 003 484




 21 003 485




 21 003 916  
 21 004 916





 21 003 917




 21 003 488



 21 003 918




TECHNICAL DATA	STANDARDS	Standard Plus 2.0mm	Standard Plus 1.5mm
<b>Classification</b>			
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43	Classes: 32 41
<b>Characteristics</b>			
Total thickness	ISO 24346 (EN 428)	2.00mm	1.5mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm	1.5mm
Total weight	ISO 23997 (EN 430)	3 300g/m <sup>2</sup>	2 475g/m <sup>2</sup>
Surface treatment	-	PUR	PUR
Abrasion group	EN 660-2	Group P: ≤ 4.00mm <sup>3</sup>	Group P: ≤ 4.00mm <sup>3</sup>
<b>Technical performances</b>			
Residual indentation	Average measured value	0.04mm	
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm	
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>fl</sub> ≤1 ≥ 8 kW/m <sup>2</sup> Pass	B <sub>fl</sub> ≤1 ≥ 8 kW/m <sup>2</sup> Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%	Rolls: ≤ 0.40%
Castor wheel test	ISO 4918 (EN 425)	Suitable	
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653		-
Static electrical charge	EN 1815	< 2kV	< 2kV
Light fastness	EN ISO 105-B02	≥ 6	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth	Does not favour growth
Clean room test	ASTM F51/00	Class A	Class A
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C	Suitable - max. 27°C


The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.



 21 003 495  
 21 004 495



 21 003 493  
 21 005 493  
 21 006 493



 21 003 500

## STANDARD PLUS

### Main Product Features

- Tiles and sheets in different thicknesses
- Classical design in refreshed colours
- Tough and durable
- PUR surface treatment for low maintenance

### Surface Treatment



### Sustainability Tag



### Logistics Information



Available in rolls  
Rolls length: 231m (2.0mm)




Rolls length: 251m (1.5mm)

Laying direction:



Available in tiles

Laying direction:



### General Information



Play with the Room Designer

# VYLON PLUS



Vylon Plus - 21000 586, 21007 593



21 000 583  
 21 007 583  
 21 001 583



21 000 580  
 21 007 580  
 21 001 580



21 000 592  
 21 007 592  
 21 001 592




21 000 590  
 21 007 590  
 21 001 590



21 000 591  
 21 007 591  
 21 001 591



21 000 589  
 21 007 589  
 21 001 589



21 000 588  
 21 007 588  
 21 001 588



21 000 596  
 21 007 596  
 21 001 596



21 000 585  
 21 007 585  
 21 001 585



21 000 587  
 21 007 587  
 21 001 587



21 000 582  
 21 007 582  
 21 001 582



21 000 581  
 21 007 581  
 21 001 581



21 000 595  
 21 007 595  
 21 001 595



21 000 594  
 21 007 594  
 21 001 594



21 000 597  
 21 007 597  
 21 001 597

# VYLON PLUS

## Main Product Features

- Versatile flooring
- Harmonious and fresh colours
- Tough and durable
- Most flexible in its category

## Surface Treatment

Factory pre-treated

## Sustainability Tag

100%

25.5%

Recyclable  
Recycled content

PHTHALATE  
FREE  
Technology

Optimal Indoor  
Air Quality

< 10 µg/m<sup>3</sup>

\*TVOC AT 28 DAYS

## Logistics Information

**Available in rolls**

**Rolls length: 20lm**

Laying direction:

↑

↓

**Available in tiles**

Laying direction:

↑

↑

↑

↑

↑

→

→

↑

## General Information

CE

EN 14041:2004

**Vylon Plus**

0019-0031-DoP-2013-07

<http://professionals.tarkett.com>

Manufactured by Tarkett AB  
SE-372 81 Ronneby, Sweden

According to European Classification ISO 10874 (EN 685)

TECHNICAL DATA	STANDARDS	Vylon Plus
<b>Classification</b>		
Classification	ISO 10581 (EN 649) commercial industrial	Classes: 34 43
UPEC Classification	UPEC Classification	U4 P3 E2/3 C2
	NF UPEC.A+ certificate (NF 189)	312-024.1
<b>Characteristics</b>		
Total thickness	ISO 24346 (EN 428)	2.00mm
Wear layer thickness	ISO 24340 (EN 429)	2.00mm
Total weight	ISO 23997 (EN 430)	3 700g/m <sup>2</sup>
Surface treatment	-	Factory pre-treated
Abrasion group	EN 660-2	Group M: ≤ 7.50mm <sup>3</sup>
<b>Technical performances</b>		
Residual indentation	Average measured value	0.04mm
	ISO 24343-1 (EN 433) requirement	≤ 0.10mm
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	B <sub>f1</sub> ≤ 1 ≥ 8 kW/m <sup>2</sup> Pass
Dimensional stability	ISO 23999 (EN 434)	Rolls: ≤ 0.40% Tiles: ≤ 0.25%
Castor wheel test	ISO 4918 (EN 425)	Suitable
Marine equipment	IMO FTPC Part 5 and 2 IMO Res. A653	
Static electrical charge	EN 1815	< 2kV
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	ISO 26987 (EN 423)	Good resistance
Fungi and bacteria resistance	ISO 846: Part C	Does not favour growth
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.3
Thermal resistance Underfloor heating	EN 12667 / DIN 52612	0.01m <sup>2</sup> K/W Suitable - max. 27°C

The above information is subject to modifications for the benefit of further improvement (07/2015).  
For more detailed technical information, please contact Tarkett.



- 21 000 584
- 21 007 584
- 21 001 584



- 21 000 586
- 21 007 586
- 21 001 586



- 21 000 593
- 21 007 593
- 21 001 593

Play with the Room Designer