



Uni - Light Green / Wood - Light Maple



Uni

Grey	Black	Sky Blue	Royal Blue	Night Blue
3917 009 3707 009 3708 009 3912 009 3914 009	3917 010 3707 010 3708 010 3912 010 3914 010	3917 017 3707 004 3708 017 3912 017 3914 017	3917 016 3707 016 3708 016 3912 016 3914 016	3912 024 3914 024
Yellow	Orange	Dark Orange	Red	Brown
3917 013 3707 013 3708 013 3912 013 3914 013	3917 012 3707 012 3708 012 3912 012 3914 012	3912 021 3914 021	3917 011 3707 003* 3708 011 3912 011 3914 011	3912 023 3914 023
Light Green	Mint Green	Field Green	Forest Green	Teal
3912 020 3914 020	3707 002 3912 026 3914 026	3917 002 3707 019 3708 002	3917 014 3707 014 3708 014 3912 014 3914 014	3917 015 3707 015 3708 015 3912 015 3914 015

*3910 002 for table tennis

TECHNICAL DATA	STANDARDS	Omnisports Compact	Omnisports Speed*	Omnisports Training*	Omnisports Reference*	Omnisports Excel*
Characteristics						
Total thickness	ISO 24346 (EN 428)	2mm	3.45mm	5mm	6.5mm	8.3mm
Total weight	ISO 23997 (EN 430)	3 045g/m ²	3 295g/m ²	4 080g/m ²	4 570g/m ²	6 035g/m ²
Width	ISO 24341 (EN 426)	2m				
Length	ISO 24341 (EN 426)	231m	20.5 / 231m			
Requirements for safety in use						
Friction	EN 13036-4	80 to 110				
Shock absorption	Average measured value	-	6%	19%	26% 27% 28%	32% 33% 35%
	EN 14808 requirement	≥ 25%				
Vertical deformation	EN 14809	-	0.4mm	1mm	1.1mm 1.3mm 1.3mm	1.2mm 1.3mm 1.2mm
Technical requirements						
Vertical ball behaviour	EN 12235	-	98%	98.4%	100% 99% 100%	100% 99% 98%
Reaction to fire	EN 13501-1	B _s s1	C _s s1	C _s s1	C _s s1	C _s s1
Resistance to wear	EN ISO 5470-1	≤ 1g				
Resistance to indentation	Average measured value	-	0.18mm	0.16mm	0.21mm 0.40mm	0.29mm 0.39mm
	EN 1516 requirement	≤ 0.50mm				
Resistance to a rolling load	EN 1569	-	-	0.22mm	0.30mm 0.40mm	0.10mm 0.30mm
Impact sound reduction	EN ISO 717-2	2dB	19dB		20dB	
In room noise	NFS 31-074	Ln,e,w = 77dB class A ≤ 65dB				
Thermal resistance	EN ISO 10456	0.02m ² .K/W	0.04m ² .K/W	0.07m ² .K/W	0.10m ² .K/W	0.12m ² .K/W
Colours						
		Uni: 10 Wood: 4	Uni: 11 Wood: 4	Uni: 10 Wood: 4	Uni: 17 - Wood: 6 Coloured Wood: 4 - Esquisse: 5	

*Vinyl sports floor covering with PVC foam backing.

• Loose laid (GreenLay) • Glued installation • On Tarkolay

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett Sports

Purple	Magenta
3912 025 3914 025	3912 022 3914 022

General Information

	Omnisports Compact 0120-003-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006		Omnisports Reference 0120-016-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006
	Omnisports Speed 0120-006-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006		Omnisports Excel 0120-041-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006
	Omnisports Training 0120-026-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006		

OMNISPORTS

Unis

Main Product Features

- Choose between 5 thicknesses to meet the right level of performance and resistance
- 17 uni decors to mix & match
- Available with GreenLay® installation method
- Table tennis solution available in Red with safety embossing for better grip
- Badminton kit ready to use

Surface Treatment



Sustainability Tag

Omnisports Compact

100% 31% Recyclable Recycled content		
--	--	--

Omnisports Speed

100% 26% Recyclable Recycled content		
--	--	--

Omnisports Training

100% 21% Recyclable Recycled content		
--	--	--

Omnisports Reference

100% 19% Recyclable Recycled content		
--	--	--

Omnisports Excel

100% 24% Recyclable Recycled content		
--	--	--

(1) Progressively for all our professional vinyl products during 2014

Logistics Information

Compact 2 mm	Speed 3.45 mm	Training 5.00 mm	Reference 6.5 mm	Excel 8.3 mm

Available in rolls

Rolls length: 20.51m or 231m
(Omnisports Compact 231m only)

Laying direction:





Wood - Golden Maple / Maple Red



Wood

 Dark Beech 3913 020 3915 020	 Beech 3916 001 3911 001 3709 001 3913 001 3915 001	 Gunstock Oak 3916 004 3911 004 3709 004	 Classic Oak 3916 003 3911 003 3709 003 3913 003 3915 003	 Golden Maple 3916 002 3911 002 3709 002 3913 002 3915 002
 Light Maple 3913 019 3915 019	 Maple Grey 3913 009 3915 009	 Maple Sky Blue 3913 017 3915 017	 Maple Mint Green 3913 018 3915 018	 Maple red 3913 011 3915 011

Esquisse

 Sky Blue 26506 002 26507 002	 Light Green 26506 001 26507 001	 Beige 26506 005 26507 005	 Dark Orange 26506 003 26507 003
-------------------------------------	--	----------------------------------	--


TECHNICAL DATA	STANDARDS	Omnisports Compact	Omnisports Speed*	Omnisports Training*	Omnisports Reference*	Omnisports Excel*
Characteristics						
Total thickness	ISO 24346 (EN 428)	2mm	3.45mm	5mm	6.5mm	8.3mm
Total weight	ISO 23997 (EN 430)	3 045g/m ²	3 295g/m ²	4 080g/m ²	4 570g/m ²	6 035g/m ²
Width	ISO 24341 (EN 426)	2m				
Length	ISO 24341 (EN 426)	23lm	20.5 / 23lm			
Requirements for safety in use						
Friction	EN 13036-4	80 to 110				
Shock absorption	Average measured value	-	6%	19%	26% 27% 28%	32% 33% 35%
	EN 14808 requirement	≥ 25%				
Vertical deformation	EN 14809	-	0.4mm	1mm	1.1mm 1.3mm 1.3mm	1.2mm 1.3mm 1.2mm
Technical requirements						
Vertical ball behaviour	EN 12235	-	98%	98.4%	100% 99% 100%	100% 99% 98%
Reaction to fire	EN 13501-1	B _s s1	C _s s1	C _s s1	C _s s1	C _s s1
Resistance to wear	EN ISO 5470-1	≤ 1g				
Resistance to indentation	Average measured value	-	0.18mm	0.16mm	0.21mm 0.40mm	0.29mm 0.39mm
	EN 1516 requirement	≤ 0.50mm				
Resistance to a rolling load	EN 1569	-	-	0.22mm	0.30mm 0.40mm	0.10mm 0.30mm
Impact sound reduction	EN ISO 717-2	2dB	19dB		20dB	
In room noise	NFS 31-074	Ln,e,w = 77dB class A ≤ 65dB				
Thermal resistance	EN ISO 10456	0.02m ² .K/W	0.04m ² .K/W	0.07m ² .K/W	0.10m ² .K/W	0.12m ² .K/W
Colours		Uni: 10 Wood: 4	Uni: 11 Wood: 4	Uni: 10 Wood: 4	Uni: 17 - Wood: 6 Coloured Wood: 4 - Esquisse: 5	

*Vinyl sports floor covering with PVC foam backing.

• Loose laid (GreenLay) • Glued installation • On Tarkolay

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett Sports

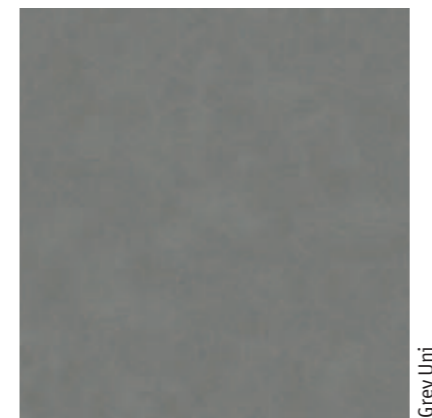

26506 004 26507 004

General Information

 0120-003-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006	 0120-016-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006
 0120-006-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006	 0120-041-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006
 0120-026-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006	

OMNISPORTS Woods / Esquisse

Main Product Features

- Choose between 5 thicknesses to meet the right level of performance and resistance
- Esquisse: new polished pattern available in 5 colours to energize sports practice and help court condition look clean
- 10 wood and coloured wood patterns to create personalized ambiance
- Available with GreenLay® installation method



Surface Treatment



Sustainability Tag

Omnisports Compact

 100% 31% Recyclable Recycled content	 PHthalate FREE Technology *except recycled content	 Optimal Indoor Air Quality *TVOC AT 28 DAYS
---	--	---

Omnisports Speed

 100% 26% Recyclable Recycled content	 PHthalate FREE Technology *except recycled content	 Optimal Indoor Air Quality *TVOC AT 28 DAYS
---	--	---

Omnisports Training

 100% 21% Recyclable Recycled content	 PHthalate FREE Technology *except recycled content	 Optimal Indoor Air Quality *TVOC AT 28 DAYS
---	--	---

Omnisports Reference

 100% 19% Recyclable Recycled content	 PHthalate FREE Technology *except recycled content	 Optimal Indoor Air Quality *TVOC AT 28 DAYS
---	--	---

Omnisports Excel

 100% 24% Recyclable Recycled content	 PHthalate FREE Technology *except recycled content	 Optimal Indoor Air Quality *TVOC AT 28 DAYS
---	--	---

(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Available in rolls

Rolls length: 20.5lm or 23lm
(Omnisports Compact 23lm only)

Laying direction: Wood Esquisse

