

LUMAFLEX DUO OMNISPORTS





Unis

 Grey 3917 009 3707 009 3708 009 3912 009	 Black 3917 010 3707 010 3708 010 3912 010	 Sky Blue 3917 017 3707 004 3708 017 3912 017	 Royal Blue 3917 016 3707 016 3708 016 3912 016	 Night Blue 3912 024
 Yellow 3917 013 3707 013 3708 013 3912 013	 Orange 3917 012 3707 012 3708 012 3912 012	 Dark Orange 3912 021	 Red 3917 011 3707 003 3708 011 3912 011	 Brown 3912 023
 Light Green 3912 020	 Mint Green 3707 002 3912 026	 Field Green 3917 002 3707 019 3708 002	 Forest Green 3917 014 3707 014 3708 014 3912 014	 Teal 3917 015 3707 015 3708 015 3912 015

Technical data	Standards	Omnisports top surface			
		Lumaflex Duo Omnisports Compact	Lumaflex Duo Omnisports Speed	Lumaflex Duo Omnisports Training	Lumaflex Duo Omnisports Reference
Characteristics					
Total weight	EN 430 ISO 23997	17.08kg/m ²	17.28kg/m ²	18.21kg/m ²	18.7kg/m ²
Width	EN 427 ISO 24342	2m			
Length	EN 426 ISO 24341	23lm	20.5lm or 23lm		
Strip dimension	EN 426 - ISO 24341 EN 427 - ISO 24342	2 430 x 295 x 18mm			
Total thickness	EN 429 ISO 24340	35mm	36.45mm	38mm	39.5mm
Technical performances					
Reaction to fire	EN 13501-1	B _{fl} -s1	C _{fl} -s1		
Friction	EN 13036-4	80 to 110			
Shock absorption	Average measured value	46%	53%	52%	56%
	EN 14808 requirement	≥ 25%			
Vertical deformation	EN 14809	1.6mm	2.6mm	2.3mm	3.1mm
Vertical ball rebound	EN 12235	98%	95%	98%	98%
Specular gloss	EN 13745 EN ISO 2813	13%	15.6%	15%	14.4%

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett Sports

 Purple 3912 025	 Magenta 3912 022
---	--

General Information

 Omnisports Compact * 0120-003-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006	 Omnisports Training * 0120-026-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006
 Omnisports Speed * 0120-006-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006	 Omnisports Reference * 0120-016-DoP-2013-04 http://professionals.tarkett.com Manufactured by: Tarkett SA 08203 Sedan - FRANCE EN 14904:2006

*This information concerns the sports multi-layer only. Please refer to construction scheme.

see page 504 for coordinated accessories offer

LUMAFLEX DUO OMNISPORTS Unis

Main Product Features

- Ideal multi-sports solution with great shock absorption for up to competition level
- Comfort and high sports performance thanks to the combination of a point-elastic covering with an area-elastic surface
- 17 uni decors to mix & match
- Easy installation, especially with GreenLay® (compatible with Lumaflex Duo Omnisports Reference)



Surface Treatment



Sustainability Tag

Omnisports Compact*

 100% 31% Recyclable Recycled content	 PHTHALATE FREE Technology	 <100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
---	--	--

Omnisports Speed*

 100% 26% Recyclable Recycled content	 PHTHALATE FREE Technology	 <100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
--	---	---

Omnisports Training*

 100% 21% Recyclable Recycled content	 PHTHALATE FREE Technology	 <100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
--	---	---

Omnisports Reference*

 100% 27% Recyclable Recycled content	 PHTHALATE FREE Technology	 <100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
--	---	---

(1) Progressively for all our professional vinyl products during 2014

Logistics Information

			
Compact 2mm	Speed 3.45mm	Training 5.00mm	Reference 6.5mm

Available in rolls
Rolls length: 20.5lm or 23lm
(Omnisports Compact 23lm only)

Laying direction: 



LUMAFLEX DUO OMNISPORTS



Wood - Golden Maple / Uni - Red



Woods




Dark Beech

3913 020



Beech

3916 001 3911 001
3709 001 3913 001



Gunstock Oak

3916 004 3911 004
3709 004



Classic Oak

3916 003 3911 003
3709 003 3913 003



Golden Maple

3916 002 3911 002
3709 002 3913 002



Light Maple

3913 019



Maple Grey

3913 009



Maple Sky Blue

3913 017



Maple Mint Green

3913 018



Maple Red

3913 011

Esquisse




Sky Blue

26506 002



Light Green

26506 001



Beige

26506 005



Dark Orange

26506 003

Technical data	Standards	Omnisports top surface			
		Lumaflex Duo Omnisports Compact	Lumaflex Duo Omnisports Speed	Lumaflex Duo Omnisports Training	Lumaflex Duo Omnisports Reference
Characteristics					
Total weight	EN 430 ISO 23997	17.08kg/m ²	17.28kg/m ²	18.21kg/m ²	18.7kg/m ²
Width	EN 427 ISO 24342	2m			
Length	EN 426 ISO 24341	23lm	20.5lm or 23lm		
Strip dimension	EN 426 - ISO 24341 EN 427 - ISO 24342	2 430 x 295 x 18mm			
Total thickness	EN 429 ISO 24340	35mm	36.45mm	38mm	39.5mm
Technical performances					
Reaction to fire	EN 13501-1	B _{fl} -s1	C _{fl} -s1		
Friction	EN 13036-4	80 to 110			
Shock absorption	Average measured value	46%	53%	52%	56%
	EN 14808 requirement	≥ 25%			
Vertical deformation	EN 14809	1.6mm	2.6mm	2.3mm	3.1mm
Vertical ball rebound	EN 12235	98%	95%	98%	98%
Specular gloss	EN 13745 EN ISO 2813	13%	15.6%	15%	14.4%

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett Sports



Grey Uni

26506 004

General Information



Omnisports Compact
0120-003-DoP-2013-04
http://professionals.tarkett.com

Manufactured by: Tarkett SA
08203 Sedan - FRANCE



Omnisports Speed
0120-006-DoP-2013-04
http://professionals.tarkett.com

Manufactured by: Tarkett SA
08203 Sedan - FRANCE



Omnisports Training
0120-026-DoP-2013-04
http://professionals.tarkett.com

Manufactured by: Tarkett SA
08203 Sedan - FRANCE



Omnisports Reference
0120-016-DoP-2013-04
http://professionals.tarkett.com

Manufactured by: Tarkett SA
08203 Sedan - FRANCE

*This information concerns the sports multi-layer only. Please refer to construction scheme.

see page 504 for coordinated accessories offer

LUMAFLEX DUO OMNISPORTS

Woods / Esquisse

Main Product Features

- Ideal multisports solution with great shock absorption for up to competition level
- Comfort and high sports performance thanks to the combination of a point-elastic covering with an area-elastic surface
- 10 wood patterns & 5 esquisse patterns
- Easy installation, especially with GreenLay® (compatible with Lumaflex Duo Omnisports Reference)



Surface Treatment



Sustainability Tag

Omnisports Compact*

100% Recycled content
31% Recycled content

PHthalate FREE Technology*

<100 µg/m³ Better Indoor Air Quality
*TVOC AT 28 DAYS

100% Recycled content
26% Recycled content

PHthalate FREE Technology*

<100 µg/m³ Better Indoor Air Quality
*TVOC AT 28 DAYS

100% Recycled content
21% Recycled content

PHthalate FREE Technology*

<100 µg/m³ Better Indoor Air Quality
*TVOC AT 28 DAYS

100% Recycled content
19% Recycled content

PHthalate FREE Technology*

<100 µg/m³ Better Indoor Air Quality
*TVOC AT 28 DAYS

(1) Progressively for all our professional vinyl products during 2014

Logistics Information



Available in rolls
Rolls length: 20.5lm or 23lm
(Omnisports Compact 23lm only)



LUMAFLEX DUO LINOSPORT



Lumaflex Linosport xf - Yellow




Linosport xf (3.2mm)



Beige

1849 611



Light green

1849 657



Grass

1849 650



Yellow

1849 628



Orange

1849 636



Carmine Red

1849 645



Sky Blue

1849 663



Grey Blue

1849 664



Dark Blue

1849 665

Linosport Classic (4mm)




Beige

1844 811



Rose

1844 880



Green

1844 808



Yellow

1844 830



Orange

1844 836



Red

1844 841



Sky Blue

1844 868



Grey

1844 869



Dark Blue


1844 865

Technical data	Standards	Linosport top surface	
		Lumaflex Duo Linosport xf	Lumaflex Duo Linosport Classic
Characteristics			
Total weight	EN 430 ISO 23997	17.9kg/m ²	18.8kg/m ²
Width	EN 427 ISO 24342	2m	
Length	EN 426 ISO 24341	28m x 2m	
Strip dimension	EN 426 - ISO 24341 EN 427 - ISO 24342	2 430 x 295 x 18mm	
Total thickness	EN 429 ISO 24340	36.2mm	37mm
Technical performances			
Reaction to fire	EN 13501-1	C _s -s1	C _s -s2
Friction	EN 13036-4	80 to 110	
Shock absorption	Average measured value	49%	48%*
	EN 14808 requirement	≥ 25%	
Vertical deformation	EN 14809	2.1mm	2.1mm
Vertical ball rebound	EN 12235	100%	97%
Specular gloss	EN 13745 EN ISO 2813	- 12%	- 3%

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett Sports

* test result = Linosport Classic with Linofinish on top

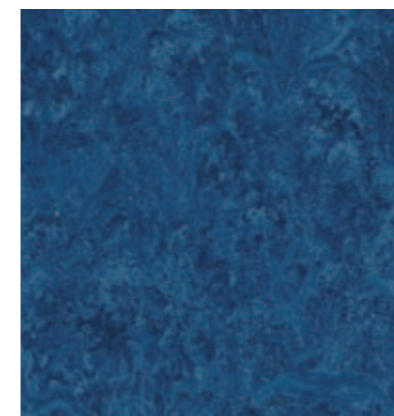

Navy Blue

1849 688

LUMAFLEX DUO LINOSPORT

Main Product Features

- Linoleum top layer for a durable solution for multi- use sportshall
- Increased resistance to wear and crushing, allowing intensive use without floor protection
- Optimal safety and sports performances
- Choose Linosport xf™ surface treatment for increased durability and reduced maintenance costs

Surface Treatment



(1) For Lumaflex Linosport xf only

Sustainability Tag

Linosport xf*

93% 78%	100% 39%	~100µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
Natural Renewable	Recyclable Recycled content	

Linosport Classic*

91% 79%	100% 41%	~100µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
Natural Renewable	Recyclable Recycled content	

Logistics Information



Available in rolls
Rolls length: 28lm

Laying direction: ↑↑

General Information



*This information concerns the sports multi-layer only. Please refer to construction scheme.

see page 504 for coordinated accessories offer