

HEAVY TRAFFIC LVT LOOSE-LAY



iD INSPIRATION LOOSE-LAY, iD TILT, SQUARE

The attractive solution that squares with the needs of offices and high traffic commercial areas

SENSORIAL BENEFITS


- Mix & match colours and designs
- Enhances company's image and creates a positive and more productive environment

FUNCTIONAL BENEFITS


- Cost-effective installation
- Great dimensional stability
- Easy access to cables and pipes (raised floors)
- No wax no polish for life with Top Clean XP!

ENVIRONMENTAL BENEFITS

- Better indoor air quality
- Improved carbon footprint
- Recyclable

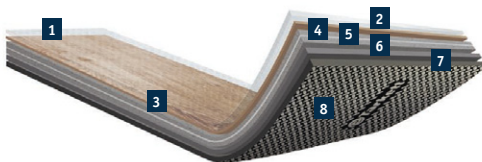

- 1 TopClean XP PUR reinforcement**
for extreme resistance and easy low cost maintenance
- 2 Wear layer**
0.55 mm for commercial traffic resistance
- 3 Printed film**
in 22 different wood and stone designs
- 4 Core layer**
for proper resistance to indentation
- 5 Glass fiber reinforcement**
for perfect dimensional stability
- 6 Bottom layer**
for a solid basis to the product
- 7 Balancing layer**
for a curl-free product
- 8 Tarkett exclusive herringbone anti-skid backing**
for exceptional adherence to the subfloor and skid resistance in all directions

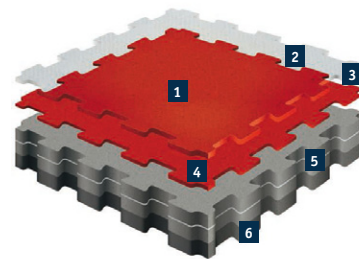



- 1 TopClean XP PUR reinforcement**
extreme resistance and easy low cost maintenance
- 2 Surface embossing for better non-slip properties**
- 3 Pure PVC transparent wear layer:**
exceptionally hardwearing and indentation resistant
- 4 Design film:**
7 design options
- 5 Core layer with glass fiber reinforcement:**
excellent dimensional stability and resistance to tear and indentation
- 6 Balancing layer for a curl-free product**

iD TILT

iD INSPIRATION LOOSE-LAY

TECHNICAL DATA	STANDARDS	iD Inspiration Loose-lay	iD TILT	Square Acoustic	Square Compact
Classification					
Type of floor covering	EN ISO 10582 - EN 649	Modular heterogeneous compact vinyl	Modular heterogeneous vinyl with interlocking connection	Modular heterogeneous vinyl on foam	Modular heterogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42	Class: 34 43	Class: 34 -	Classes: 34 43
Characteristics					
Total thickness	EN ISO 24346 (EN 428)	4.50mm	5.0 mm	4.70mm	4.00mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm	0.70 mm	0.80mm	0.70mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²	8 000 g	5 487g/m ²	5 900g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™	TopClean XP™	TopClean XP™	
Abrasion group	EN 660-2 EN ISO 10582	≤ 2.00 mm ³ Type I			
Technical performances					
Residual indentation	Average measured value	-	-	0.15mm	≤ 0.10mm
	EN ISO 24343-1 (EN 433) requirement	<0.10 mm	< 0.10 mm	≤ 0.20mm	
Reaction to fire	EN 13501-1	B _f s1 over any wood derivative panel	B _{fl} s1 over any wood derivative panel	B _f s1 loose-laid or glued over any A2 _f or A1 _f substrate (concrete) C _f s1 loose-laid or glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30			
Dimensional stability	EN ISO 23999 (EN 434)	< 0.10%	< 0.15%	Length + width ≤ 0.10%	
Furniture leg	EN 424	No damage			
Electrical properties	EN 1815 EN 1081	< 2 kV on concrete R1 > 10 ⁹ ohms			
Chemical resistance	EN ISO 26987 (EN 423)	High resistance			
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	0.05 m2 K/W Suitable	0.06m ² K/W Suitable	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6	≥ 6	≥ 6	
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 8dB	ΔL _w = 6 dB	ΔL _w = 14dB	ΔL _w = 8dB
Acoustic absorption	EN ISO 354 EN ISO 11654	α _w = 0.05			
Acoustic Improvement	NF S 31-074	L _{n,e,w} < 75dB			
Form of delivery	EN ISO 24342 (EN 427)	Planks: 22.9 x 121.9cm Tiles: 30.5 x 61cm	Tiles: 45.7 x 45.7 cm 91.4 x 91.4 cm	Tiles: 50 x 50cm	
Colours		22	7	36	

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

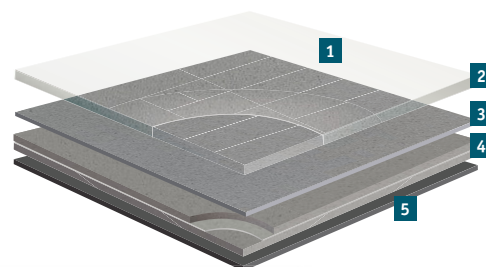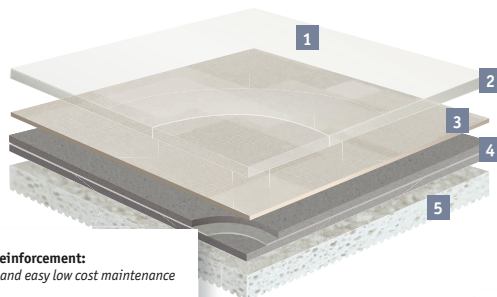

- 1 TopClean XP PUR reinforcement:**
extreme resistance and easy low cost maintenance
- 2 0.80mm pure PVC transparent wear layer:**
resistance to wear
- 3 Decorated compact impregnation:**
36 design options
- 4 Structure built with solid homogeneous calandered layers reinforced with non-woven glass fibre:**
exceptional dimensional stability and excellent resistance to tear and indentation
- 5 Chemical foam backing:**
acoustic performances

- 1 TopClean XP PUR reinforcement:**
extreme resistance and easy low cost maintenance
- 2 0.70mm pure PVC transparent wear layer:**
resistance to wear
- 3 Decorated compact impregnation:**
36 design options
- 4 Calandered homogeneous structure for stability**
- 5 PVC backing**

SQUARE ACOUSTIC

SQUARE COMPACT

ID INSPIRATION LOOSE-LAY



Beach Wood - Beige - Grey



Beach Wood



Beige


2464 0009



Grey

2464 0010

Delicate Wood



Natural

2464 0011



Brown

2464 0012



Black

2464 0013

Elegant Oak



White

2464 0014



Natural

2464 0015

TECHNICAL DATA	STANDARDS	iD Inspiration Loose-lay
Classification		
Type of floor covering	EN ISO 10582 - EN 649	Modular heterogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™
Abrasion group	EN 660-2 EN ISO 10582	≤ 2.0mm ³ Type I
Technical performances		
Residual indentation	Average measured value	-
Reaction to fire	EN 13501-1	B _n s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Electrical properties	EN 1081	ca. 10 ¹¹ ohm
Chemical resistance	EN ISO 26987 (EN 423)	High resistance
Thermal resistance	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔLw = 8dB

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION Loose-lay

Main Product Features

- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency (Square Acoustic: 14dB)
- Superior indentation resistance

Surface Treatment



Sustainability Tag



(1) For all products produced in 2015

Logistics Information

Available in planks



22,9 x 121,9cm

General Information



Sawn Oak



Grey

2464 0016



Brown

2464 0017



Dark Brown

2464 0018



Play with the Room Designer

7 ID INSPIRATION LOOSE-LAY



Beton - White - Grey - Black



Limed Oak



Beige

2464 0000



Grey

2464 0001



Brown

2464 0002

Mountain Oak




Natural

2464 0003



Brown

2464 0004



Black

2464 0005

Christmas Pine



White

2464 0006



Natural

2464 0007



Brown

2464 0008

TECHNICAL DATA	STANDARDS	iD Inspiration Loose-lay
Classification		
Type of floor covering	EN ISO 10582 - EN 649	Modular heterogeneous compact vinyl
Classification	ISO 10874 (EN 685) commercial industrial	Classes: 33 42
Characteristics		
Total thickness	EN ISO 24346 (EN 428)	4.50mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.55mm
Total weight	EN ISO 23997 (EN 430)	7 500g/m ²
Polyurethane reinforcement (PUR)	-	TopClean XP™
Abrasion group	EN 660-2 EN ISO 10582	≤ 2.0mm ³ Type I
Technical performances		
Residual indentation	Average measured value	-
Reaction to fire	EN 13501-1	B _s s1 over any wood derivative panel
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.10%
Furniture leg	EN 424	No damage
Electrical properties	EN 1081	ca. 10 ¹¹ ohm
Chemical resistance	EN ISO 26987 (EN 423)	High resistance
Thermal resistance	EN ISO 10456	0.04m ² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6
Impact sound reduction	EN ISO 10140-3 EN ISO 717/2	ΔL _w = 8dB

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

iD INSPIRATION Loose-lay

Main Product Features

- Tarkett exclusive anti-skid backing preventing sliding in all directions
- No permanent adhesive needed; fast and easy installation
- Excellent resistance to scratches and abrasion
- Excellent acoustic efficiency (Square Acoustic: 14dB)
- Superior indentation resistance

Surface Treatment




Sustainability Tag



(1) For all products produced in 2015

Logistics Information

Available in planks and tiles



22.9 x 121.9cm

General Information



Beton




White

2464 1000



Black

2464 1001

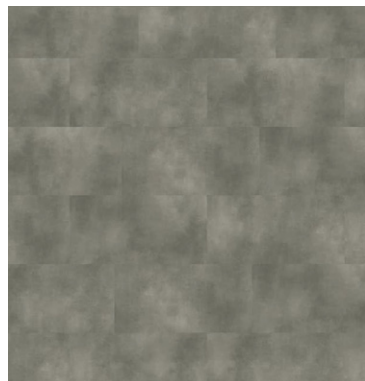

Grey

2464 1002



Play with the Room Designer