

ELEGANCE



Elegance - Oak Lime Stone Brushed



Oak Brushed

41008001



Oak Lime Stone Brushed

41008002



Oak Urban Grey Brushed

41008004



Oak Umber Brown Brushed

41008003

TECHNICAL DATA	STANDARDS	Elegance
Characteristics		
Total thickness	ISO 24346 (EN 428)	22mm
Width	-	280mm
Length	-	2520mm
Wearlayer thickness	-	app. 4.0mm
Weight	-	app. 13.1kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17$ dB with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction to fire	EN 13501	D _{s1}
Thermal insulation value board only		RT = 0.152m ² K/W
Thermal insulation value with ragfelt		RT = 0.182m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.192m ² K/W
Underfloor heating compatible		TBC
Taber abramer/Lacquer's wear resistance*		
Abrasion penetration Protoco Lacq.	prEN 13696	N/A
Abrasion penetration Protoco Nat.	prEN 13696	N/A
Abrasive wear	-	N/A

* Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

ELEGANCE

Main Product Features

- 22mm thick and 2520mm long with a 4 mm wear layer (can be re-sanded 3-4 times)
- Minibevel length- and shortwise
- Proteco Hardwax oil
- T&G profile
- Recommended for glue down installation


Surface Treatment



Logistics Information



Sustainability Tag



General Information



HERITAGE



Heritage - Oak Brushed



Oak Brushed

- 190 x 2200mm 41007001
- 190 x 2000mm 41007009



Oak Old Brown Brushed

- 190 x 2200mm 41007004




Oak Old Grey Brushed

- 190 x 2200mm 41007005



Oak Urban Grey Brushed

- 190 x 2200mm 41007007



Oak Blonde Brushed

- 190 x 2200mm 41007008



Oak Lime Stone Brushed

- 190 x 2200mm 41007002
- 190 x 2000mm 41007010

TECHNICAL DATA	STANDARDS	Heritage
Characteristics		
Total thickness	ISO 24346 (EN 428)	14mm
Width	-	190mm
Length	-	2 000 - 2 520mm
Wearlayer thickness	-	app. 3.5mm
Weight	-	app. 8.0kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17$ dB with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction to fire	EN 13501	D _{fl}
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt		RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Abrasion penetration Proteco Lacq.	prEN 13696	> 4000 revs
Abrasion penetration Proteco Nat.	prEN 13696	> 3500 revs
Abrasive wear	-	3.5mg/100 revs

* Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

HERITAGE

Main Product Features

- 14mm thick with a wear layer of 3.5mm wear layer (can be re-sanded 3-4 times)
- Handmade bevels lengthwise and deep brushed surface
- Proteco hardwax oil
- User friendly, glue-free locking system: 2-lock




Surface Treatment



Logistics Information



Sustainability Tag



General Information





Vintage - Oak Brown




Oak Brown

- 190 x 2000mm 7877 021
- 190 x 2200mm 7877 001



Oak Light Hazel

- 190 x 2000mm 7877 018



Oak Olive

- 190 x 2000mm 7877 019
- 190 x 2200mm 7877 024



Oak Soft Grey

- 190 x 2000mm 7877 020
- 190 x 2200mm 7877 025

TECHNICAL DATA	STANDARDS	Vintage
Characteristics		
Total thickness	ISO 24346 (EN 428)	14mm
Width	-	190mm
Length	-	2000 - 2520mm
Wearlayer thickness	-	app. 3.5mm
Weight	-	app. 8.0kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17$ dB with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction to fire	EN 13501	D _{fl}
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt		RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Abrasion penetration Proteco Lacq.	prEN 13696	> 4000 revs
Abrasion penetration Proteco Nat.	prEN 13696	> 3500 revs
Abrasive wear	-	3.5mg/100 revs

* Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.
The above information is subject to modifications for the benefit of further improvement (01/2014).
For more detailed technical information, please contact Tarkett.

Main Product Features

- 14mm thick with a wear layer of 3.5mm wear layer (can be re-sanded 3-4 times)
- Mechanical stressed and stained surface for a vintage look
- Proteco Natura (matt lacquer)
- User friendly, glue-free locking system: 2-lock




Surface Treatment



Logistics Information



Sustainability Tag



General Information



SEASONS



Seasons - Oak Winter Brushed




Oak Winter Brushed

- 162 x 2000mm 7876007
- 162 x 2200mm 7876025
- 162 x 2520mm 7876024



Oak Spring Brushed

- 162 x 2200mm 7876096



Oak Autumn Brushed

- 162 x 2200mm 7876098



Oak Summer Brushed

- 162 x 2000mm 7876097

TECHNICAL DATA	STANDARDS	Seasons
Characteristics		
Total thickness	ISO 24346 (EN 428)	14mm
Width	-	162mm
Length	-	2000 - 2520mm
Wearlayer thickness	-	app. 3.5mm
Weight	-	app. 8.0kg/m ²
Technical performances		
Reduction of sound weighted index "footfall" to the room below.	NF EN ISO 140-8/ Acc to NF EN ISO 717-2	$\Delta L_w = 17$ dB with 2mm Tarkofoam/flex II
Formaldehyde emission	EN 13986	E1
Reaction to fire	EN 13501	D _{fl}
Thermal insulation value board only		RT = 0.101m ² K/W
Thermal insulation value with ragfelt		RT = 0.121m ² K/W
Thermal insulation value with 2mm Tarkofoam/flex II		RT = 0.141m ² K/W
Underfloor heating compatible		Maximum floor surface temperature 27°C with self-regulating under-floor heat system
Taber abraser/Lacquer's wear resistance*		
Abrasion penetration Proteco Lacq.	prEN 13696	> 4000 revs
Abrasion penetration Proteco Nat.	prEN 13696	> 3500 revs
Abrasive wear	-	3.5mg/100 revs

* Data show results with new components according to 2006 update. Method not applicable for hardwax oiled floors or brushed products due to the structured surface.

The above information is subject to modifications for the benefit of further improvement (01/2014).

For more detailed technical information, please contact Tarkett.

SEASONS

Main Product Features


- 14mm thick with a wear layer of 3.5mm wear layer (can be re-sanded 3-4 times)
- Stained and brushed surfaces with hand-made bevels without stain in the bevels
- Proteco Natura (matt lacquer)
- User friendly, glue-free locking system: 2-lock




Surface Treatment



Logistics Information

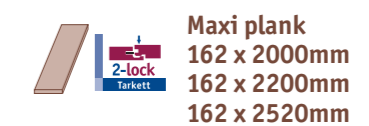

Sustainability Tag



General Information

