

SELECT 833



A dedicated laminate collection developed for the specific needs of commercial applications

SENSORIAL BENEFITS


- Imagined and designed to create signature ambience
- Exclusive designs selected for stores and shops and hospitality
- Acoustic and thermal confort

FUNCTIONAL BENEFITS

- Overnight installation: quick installation, no mess, can be used immediately
- 100% matching accessories
- Heavy display furniture & use of trolleys and carts: reinforced construction to avoid damage and indentation

ENVIRONMENTAL BENEFITS

- 84% natural, 100% recyclable and produced in ISO certified plant

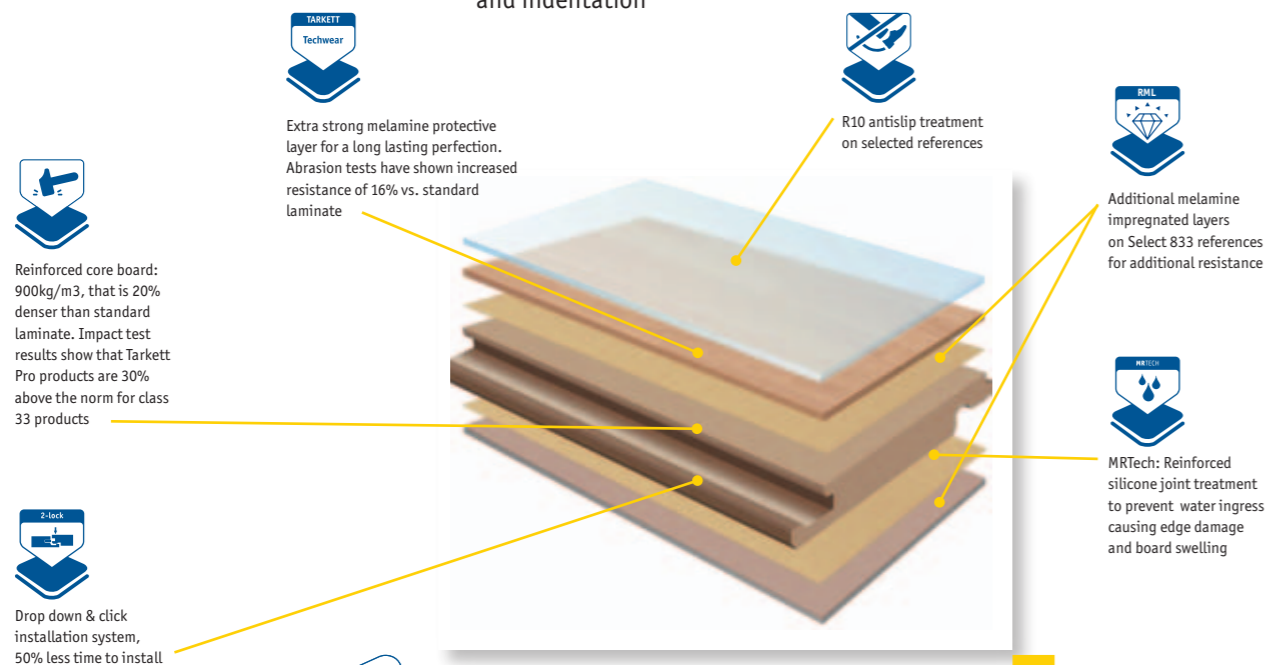

Available: Soundblock
Foam underlayer,
noise reduction of 19 dB!
see p. 499

SELECT 833

TECHNICAL DATA	STANDARDS	Select 833
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 33
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2	None 19dB
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	8kg/m ³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 - group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W
Form of delivery	EN 24341 (EN 426)	Planks

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.




Download the product offer

SELECT 833





Farmhouse - Pine




<p>Modern Wenge</p>  <p>Luminous</p> <p>◆ 42023 346</p>	<p>Mocha Sherwood Oak</p>  <p>Eir</p> <p>◆ 42021 216</p>	<p>Coffee</p>  <p>Stone Reflection</p> <p>★ 42028 391</p>	<p>Heritage Traditional Oak</p>  <p>Eir/Stratochrome / Antislip</p> <p>◆ 42022 394 / 42031 394</p>	<p>Heritage Whitened Oak</p>  <p>Antislip</p> <p>◆ 42031 395</p>
<p>Deep Honey Sherwood</p>  <p>Eir / Antislip</p> <p>◆ 42021 214 / 42031 214</p>	<p>Princess Fontainebleau Oak</p>  <p>Antislip</p> <p>▲ 42031 222</p>	<p>Antique Maple</p>  <p>Standard</p> <p>● 42030 393</p>	<p>Wine</p>  <p>Matt Wood</p> <p>★ 42025 390</p>	<p>Narrow Light Patchwork</p>  <p>Matt Wood</p> <p>★ 42027 386</p>
<p>Beige Sherwood Oak</p>  <p>Eir / Antislip</p> <p>◆ 42021 218 / 42031 218</p>	<p>Rough Cherry</p>  <p>Matt</p> <p>● 42024 388</p>	<p>White and Hype</p>  <p>Eir</p> <p>◆ MTO*</p>	<p>Antique Paint</p>  <p>Matt</p> <p>◆ 42024 387</p>	<p>Suede Sherwood Oak</p>  <p>Eir</p> <p>◆ 42021 217</p>
<p>Farmhouse Pine</p>  <p>Matt Wood</p> <p>◆ 42025 397</p>	<p>Barn Oak</p>  <p>Autentico / Antislip</p> <p>◆ 42020 392 / 42031 392</p>	<p>Bergamo Grey Oak</p>  <p>Matt Wood</p> <p>▲ 42025 362</p>	<p>Contrasting Pine</p>  <p>Autentico</p> <p>◆ 42020 396</p>	<p>Narrow Fumes Patchwork</p>  <p>Patina</p> <p>★ 42026 359</p>

TECHNICAL DATA	STANDARDS	Select 833
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 33
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2	None 19dB
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	8kg/m ³
Technical performances		
Reaction to fire	EN 13501-1	C _n - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

<p>Wild Light Stone</p>  <p>Stone Reflection</p> <p>★ 42028 356</p>	<p>Jeans</p>  <p>Matt</p> <p>★ MTO*</p>
---	---

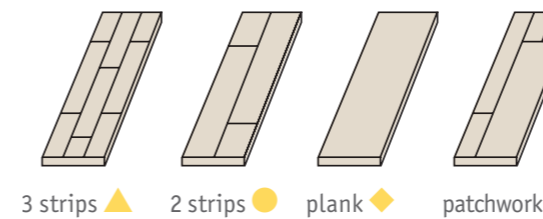

*MTO: made to order. Please check with your local sales representative or call our local customer service

Select 833

Main Product Features


- Superior resistance to abrasion and scratches
- Low swelling board and treated edges (MR tech treatment)
- Antistatic: no unpleasant electro-static discharges
- 2-lock: most user-friendly locking system on the market



Surface and Edge Treatment



Sustainability Tag

84% 80% Natural Renewable	100% Recyclable	 Better Indoor Air Quality *TVOC AT 28 DAYS
---------------------------------	--------------------	---

Logistics Information

mm	1 292 x 194 x 8	planks/box	8
class	33	m ² /box	2 005
guarantee	10 years professional use	box/pallet	56
click	2-Lock	kg/m ²	8

General Information

Select 833

004 - D o P - 2013 - 07 - 01
<http://professionals.tarkett.com>
 Manufactured by: LaminatePark GmbH & Co KG
 D-66265 Heusweiler - Eifel, GERMANY

According to European Classification EN 685



Play with the Room Designer

SMART PRO 832



The designs end customers are looking for with the quality required for housing, small shops and hospitality segments

SENSORIAL BENEFITS

- Imagined and designed to create signature ambiance
- Exclusive designs selected for Stores and shops and hospitality
- Acoustic and thermal confort

FUNCTIONAL BENEFITS

- Overnight installation: quick installation, no mess, can be used immediately
- 100 % matching accessories
- Heavy display furniture & use of trolleys and carts: reinforced construction to avoid damage and indentation

ENVIRONMENTAL BENEFITS

- 84% natural, 100% recyclable and produced in ISO certified plant



Reinforced core board: 900kg/m³, that is 20% denser than standard laminate. Impact test results show that Tarkett Pro products are 30% above the norm for class 32 products



Drop down & click installation system, 50% less time to install



Extra strong melamine protective layer for a long lasting perfection. Abrasion tests have shown increased resistance of 16% vs. standard laminate



R10 antislip treatment on selected references



MRTech: Reinforced silicone joint treatment to prevent water ingress causing edge damage and board swelling



Available: Soundblock Foam underlayer, noise reduction of 19 dB! see p. 499

SMART PRO 832

TECHNICAL DATA	STANDARDS	Smart PRO 832
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 32
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2 Acoustic improvement NF S31-074 NF UPEC.A+ certificate (NF 189)	U3 P3 19dB - ST10-026
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	7.8kg/ m ³
Technical performances		
Reaction to fire	EN 13501-1	C _{fl} - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 - group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W
Form of delivery	EN 24341 (EN 426)	Planks

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.


















Download the product offer

SMART PRO 832



Light Oiled - Oak



<p>Modern Wenge</p>  <p>Luminous</p> <p>◆ 42023 346</p>	<p>Mocha Sherwood Oak</p>  <p>Eir</p> <p>◆ 42021 216</p>	<p>King Fontainebleau Oak</p>  <p>Eir</p> <p>▲ 42012 224</p>	<p>Deep Honey Sherwood Oak</p>  <p>Eir</p> <p>◆ 42012 214</p>	<p>Light Oiled Oak</p>  <p>Matt Wood</p> <p>◆ 42017 361</p>
<p>Heritage Traditional Oak</p>  <p>Eir Stratochrome</p> <p>◆ 42013 394</p>	<p>Heritage Whitened Oak</p>  <p>Autentico</p> <p>◆ 42011 395</p>	<p>Princess Fontainebleau Oak</p>  <p>Eir</p> <p>▲ 42012 222</p>	<p>Canyon Beech</p>  <p>Standard</p> <p>◆ 42018 074</p>	<p>Beige Sherwood Oak</p>  <p>Eir</p> <p>◆ 42012 218</p>
<p>Rough Cherry</p>  <p>Matt</p> <p>● 42016 388</p>	<p>Polar Ash</p>  <p>Matt Wood</p> <p>● 42017 389</p>	<p>White and Hype</p>  <p>Eir</p> <p>◆ MTO*</p>	<p>Suede Sherwood Oak</p>  <p>Eir</p> <p>◆ 42021 217</p>	<p>Bergamo Grey Oak</p>  <p>Matt Wood</p> <p>▲ 42017 362</p>

TECHNICAL DATA	STANDARDS	Smart PRO 832
Classification		
Classification	ISO 10874 (EN 685) commercial	Class: 32
UPEC Classification	UPEC Classification Impact sound reduction EN ISO 717/2 Acoustic improvement NF S31-074 NF UPEC.A+ certificate (NF 189)	U3 P3 19dB - ST10-026
Characteristics		
Total thickness	ISO 24346 (EN 428)	8mm
Total weight	ISO 23997 (EN 430)	7.8 kg/m ³
Technical performances		
Reaction to fire	EN 13501-1	C _s - S1
Slip resistance	DIN 51130 EN 13893	≥ 0.30 - Class DS
Dimensional variations	EN 13 329	≥ 0.9mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 (EN 425)	No change in appearance or damage
Curl resultant to heat	ISO 23999 (EN 434)	Non Applicable
Electrostatic properties	EN 1815 EN 1081	up ≤ 2kV
Stain resistance	EN 438-2 (Group 1, 2 & 3)	Groups 1 & 2: grade 5 group 3: ≥ grade 4
Hygiene	-	Non Applicable
Thermal resistance Underfloor heating	DIN EN 12667	≤ 0.150m ² K/W

The above information is subject to modifications for the benefit of further improvement (01/2014). For more detailed technical information, please contact Tarkett.

Smart PRO 832

Main Product Features

- Superior resistance to abrasion and scratches
- Low swelling board and treated edges (MR tech treatment)
- Antistatic: no unpleasant electro-static discharges
- 2-lock: most user-friendly locking system on the market



Surface and Edge Treatment



Sustainability Tag

84% 80% Natural Renewable	100% Recyclable	<100 µg/m ³ Better Indoor Air Quality *TVOC AT 28 DAYS
------------------------------------	--------------------	--

Logistics Information


mm	1 292 x 194 x 8	planks/box	8
class	32	m ² /box	2 005
guarantee	10 years professional use	box/pallet	56
click	2-Lock	kg/m ²	7.8

General Information

Smart PRO 832
003 - D o P - 2013 - 07 - 01
<http://professionals.tarkett.com>
Manufactured by: LaminataPark GmbH & Co KG
D-66265 Heusweiler - Eifel, GERMANY
EN 14041:2004

According to European Classification EN 685

<p>Soft Cumin Oak</p>  <p>Eir Light Catcher</p> <p>◆ 42014 365</p>	<p>Soft Cinnamon Oak</p>  <p>Eir Light Catcher</p> <p>◆ 42014 368</p>	<p>Contrasting Pine</p>  <p>Autentico</p> <p>◆ 42011 396</p>
<p>Grey Mocha Sherwood Oak</p>  <p>Eir</p> <p>◆ 42012 289</p>	<p>Wild Light Stone</p>  <p>Stone Reflection</p> <p>★ 42019 356</p>	

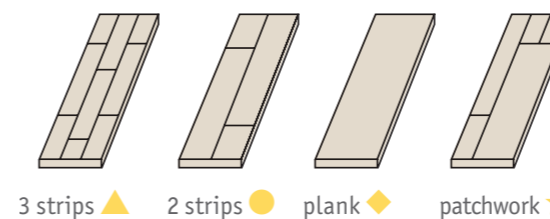

*MTO: made to order. Please check with your local sales representative or call our local customer service



Play with the Room Designer