



The ideal solution for renovation of housing with the best value for money ratio

SENSORIAL BENEFITS


- Timeless designs and colours for a never out of style interior decoration

FUNCTIONAL BENEFITS

- Range available in 2m and 4m to allow seamless installation in every room

ENVIRONMENTAL BENEFITS

- PU protection avoiding excessive use of chemicals or cleaning solvents for maintenance
- Low VOC emissions improving the indoor air quality

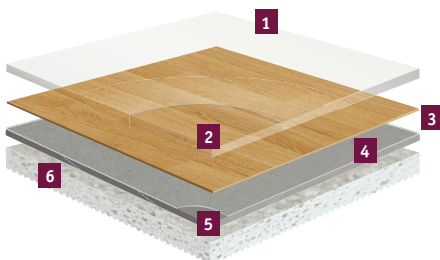

- 1 TopClean PUR reinforcement:**
very high resistance to scratches and easy maintenance
- 2 Pure PVC transparent wear layer:**
resistance to abrasion
- 3 High definition print:**
for perfect designs
- 4 Glass fibre non-woven reinforcement:**
superior dimensional stability
- 5 Solid homogeneous calandered sheet made of recycled vinyl:**
resistance to indentation and tearing
- 6 High density closed-cell foam backing:**
sound reduction and comfort underfoot

TECHNICAL DATA	STANDARDS	TX Classic	
		2m	4m
Classification			
Type of floor covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	Classes: 23 31
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.60mm	
Wear layer thickness	ISO 24340 (EN 429)	0.25mm	
Total weight	ISO 23997 (EN 430)	1 800g/m ²	
PUR Reinforcement	–	TopClean	
Abrasion group	EN 660-2	Group T: ≤ 2mm ³	
Technical performances			
Residual indentation	Average measured value	≤ 0.35mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _n s1 glued over any A2 _n or A1 _n substrate (concrete) C _n s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	–	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	ΔL _w = 19dB	
Acoustic improvement	NF S 31-074	L _{n,e,w} < 65dB Class A	
Form of delivery	ISO 24341 (EN 426)	Rolls: 25lm x 2m	Rolls: 25lm x 4m
	ISO 24342 (EN 427)		
Colours		Castel: 6 Wood: 4	Castel: 6 Wood: 4

The above information is subject to modifications for the benefit of further improvement (07/2015).


For more detailed technical information, please contact Tarkett.



Download the product offer



Castel




Chambord

-  3503 013
-  3505 008




Chantilly

-  3503 014
-  3505 011



Amboise

-  3503 033
-  3505 033



Chenonceau

-  3503 034
-  3505 034





Cheverny



-  3503 035
-  3505 035

Gea






-  3503 030
-  3505 030



-  3503 031
-  3505 031



Oak



-  3503 024
-  3505 024

Beech



-  3503 025
-  3505 025



TECHNICAL DATA	STANDARDS	TX Classic	
		2m	4m
Classification			
Type of floor covering	ISO 11638 (EN 651)	Heterogeneous Acoustic Vinyl	
Classification	ISO 10874 (EN 685) domestic commercial	Classes: 23 31	Classes: 23 31
Characteristics			
Total thickness	ISO 24346 (EN 428)	2.60mm	
Wear layer thickness	ISO 24340 (EN 429)	0.25mm	
Total weight	ISO 23997 (EN 430)	1 800g/m ²	
PUR Reinforcement	-	TopClean	
Abrasion group	EN 660-2	Group T: ≤ 2mm ³	
Technical performances			
Residual indentation	Average measured value	≤ 0.35mm	
	ISO 24343-1 (EN 433) requirement		
Reaction to fire	EN 13501-1	C _{fl} s1 glued over any A ₂ _{fl} or A ₁ _{fl} substrate (concrete) C _{fl} s1 glued over any derivative wood substrate	
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0.30	
Dimensional stability	ISO 23999 (EN 434)	≤ 0.10%	
Furniture leg	EN 424	No damage	
Castor wheel test	ISO 4918 (EN 425)	No damage	
Curl resultant to heat	ISO 23999 (EN 434)	≤ 8mm	
Electrostatic properties	EN 1815 EN 1081	≤ 2kV on concrete R1 > 10 ⁹ ohms	
Chemical resistance	ISO 26987 (EN 423)	High resistance	
Hygiene	-	Does not contribute to infection spreading	
Thermal resistance Underfloor heating	EN ISO 10456	0.04m ² K/W Suitable	
Light fastness	EN ISO 105-B02	≥ 6	
Impact sound reduction	EN ISO 10140-3 (EN 717-2)	ΔL _w = 19dB	
Acoustic improvement	NF S 31-074	L _{n,e,w} < 65dB Class A	

The above information is subject to modifications for the benefit of further improvement (07/2015).
For more detailed technical information, please contact Tarkett.

Castel



Biolois

-  3503 001
-  3505 009

TX CLASSIC

Stone, Wood


Main Product Features

- Higher sound absorption (19dB)
- Good indentation and traffic resistance
- Available in 2 and 4m
- Low cost and easy maintenance with PU protection

Surface Treatment



Sustainability Tag



(1) For all products produced in 2015

Logistics Information



Available in rolls: 2 & 4m
Rolls length: 25m

Laying direction:



General Information



According to European Classification ISO 10874 (EN 685)



Play with the Room Designer